



## Alliant Energy - Gas Service Manual

### Chapter 6 – Manufactured Homes

**Issued:** 2019

**Supersedes:** 2018

---

#### A. SCOPE

1. Manufactured homes are defined as homes built on a permanent steel chassis and designed for use as a dwelling with or without a permanent foundation.
  2. A manufactured home that is supported on an all-weather wood, concrete, or concrete block foundation, constructed in accordance with a recognized building code, and permanently connected water and sewer systems can be considered a permanent dwelling.
- 

#### B. GENERAL

1. The customer shall consult the Company before a manufactured home installation is planned or started. The manufactured home meter and service installation shall be located external to the manufactured home and not under, on, or in the manufactured home.
  2. If rebuilding and/or relocation of the gas main, service, or metering equipment are required, the customer may be required to pay the entire cost.
  3. Shut-off valves on the Company owned side of the figures on the following pages may only be operated by Company personnel. It is recommended that customers install their own shut-off valve for maintenance or emergency use. Shut-off valves must comply with ASME B16.33, B16.34 or B16.38 and must be rated for a minimum of 125 psig.
  4. Manufactured homes not supported as described in the Scope above must have a manufactured home flex connector approved for outdoor use between the manufactured home and supply piping (NFPA 54, Section 9.6).
  5. Each flex connector shall be installed completely outside the manufactured home and skirting in such a manner as to provide for immediate visible inspection and flexibility during frost conditions.
  6. The flexible connector should not be more than 6 feet in length with a capacity rating adequate to supply the connected load.
-



7. Exterior piping and piping underneath the manufactured home must be supported in accordance with NFPA 54, Section 7.2.6.
8. The manufacturers listed below provide flexible connectors which meet NFPA 54, Section 9.6 and ANSI Z21.75 and are considered acceptable by the Company. This list does not include all manufacturers that meet these criteria but is intended to provide a sample of sources from which acceptable connectors can be obtained.

<u>Manufacturer</u>	<u>Trade Name</u>
<u>Dormont</u>	<u>Super-Safe</u>
<u>BassCraft</u>	<u>ProCoat</u>


---

### C. MANUFACTURED HOME PARKS

1. The gas distribution system in a manufactured home park will be installed and owned by the Company to each metering point. The park owner or customer(s) is responsible for piping from the meter installation to the manufactured home(s).
2. All customer owned metallic fuel gas piping systems shall comply with corrosion control requirements set forth in applicable federal, state and local codes, NFPA 54 and GSM Chapter 5.
3. For suggestions regarding customer owned material, consult the Company.



**D. GAS SERVICE TO A SINGLE MANUFACTURED HOME – ADJACENT**

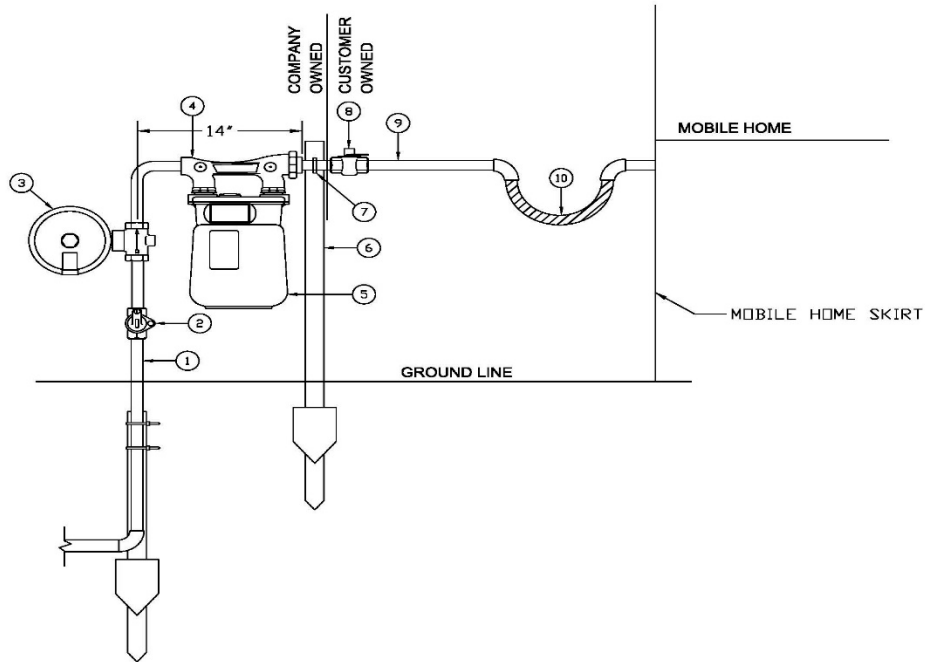

**E. GAS SERVICE TO A SINGLE MANUFACTURED HOME – REMOTE**

